




Manual on Uniform Traffic Control Devices for Streets and Highways

An Overview of Changes
in the 11th Edition related to
Vulnerable Road Users

As published in the December 2023
Notice of Final Rule



U.S. Department
of Transportation
**Federal Highway
Administration**

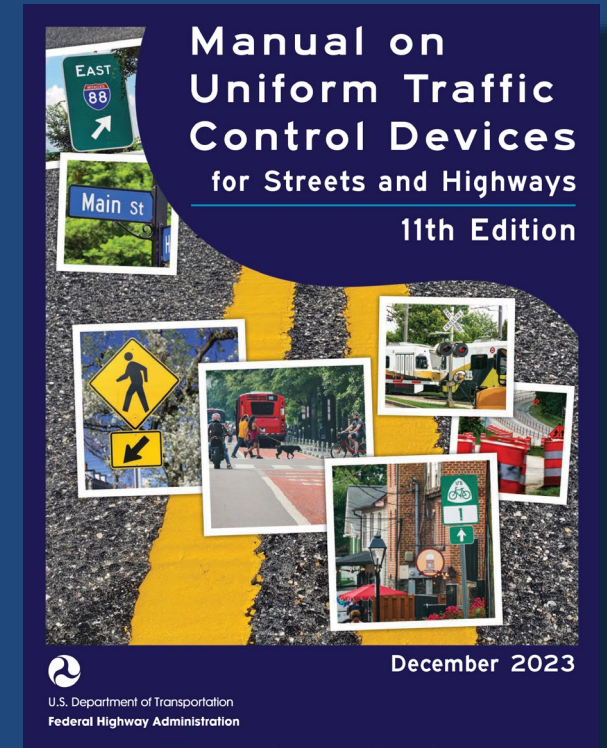


Prepared by the
**Federal Highway Administration's
Office of Operations
Traffic Control Devices Program
April 11, 2024**

Disclaimers

Except for the statutes and regulations cited, the contents of this presentation do not have the force and effect of law and are not meant to bind the States or the public in any way. This presentation is intended only to provide information regarding existing requirements under the law or agency policies.

FHWA is the source of all images in this presentation unless otherwise indicated.



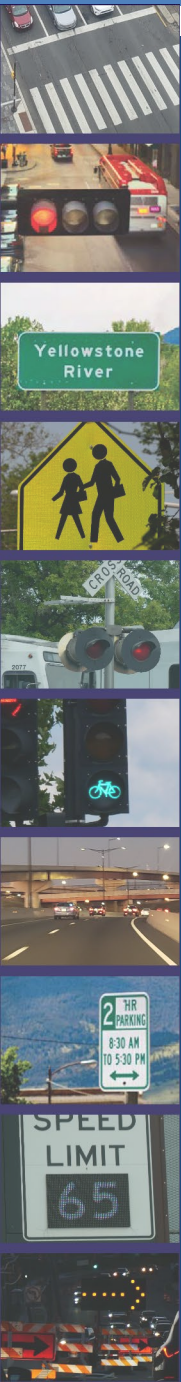

BACKGROUND

The MUTCD



U.S. Department
of Transportation


**Federal Highway
Administration**

Traffic Control Devices . . . the Voice of the Road.

What is the MUTCD? (1/3)

- ▶ **The MUTCD is the national standard** for traffic control devices (TCDs)—those signs, signals, and pavement markings we see on all streets, highways, and bikeways open to public travel, regardless of funding source or jurisdiction in accordance with Federal regulations.¹

¹ 23 Code of Federal Regulations (CFR) Part 655.603.

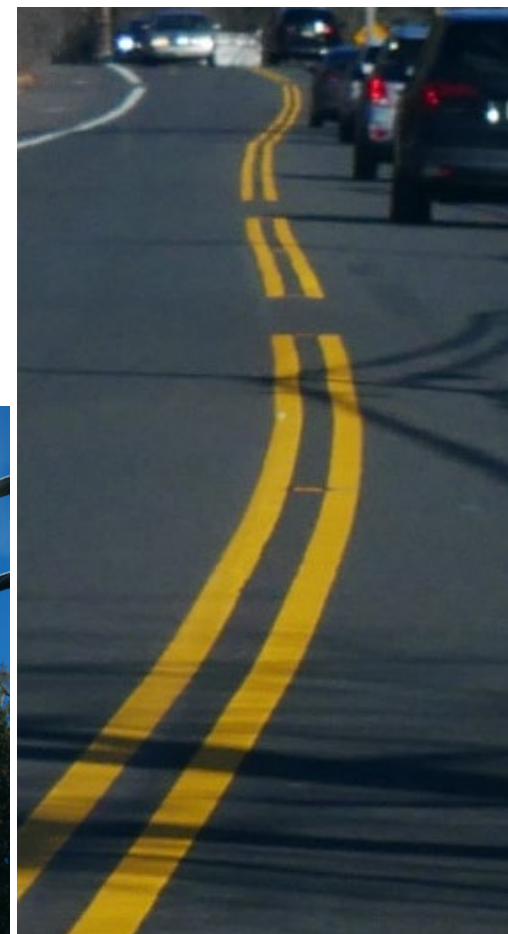

What is the MUTCD? (2/3)

► **Not a roadway design manual:**

- ▷ Does not dictate many policy and planning decisions made at local level:
 - ▷ Land use, zoning
 - ▷ Type and character of facility; prioritization of travel modes


► **Local agencies decide design features:**

- ▷ Number of lanes
- ▷ Bike or other special-use lanes
- ▷ Access control



What is the MUTCD? (3/3)

- ▶ **The MUTCD is the standard for the devices that communicate the result of all these decisions to road users.**

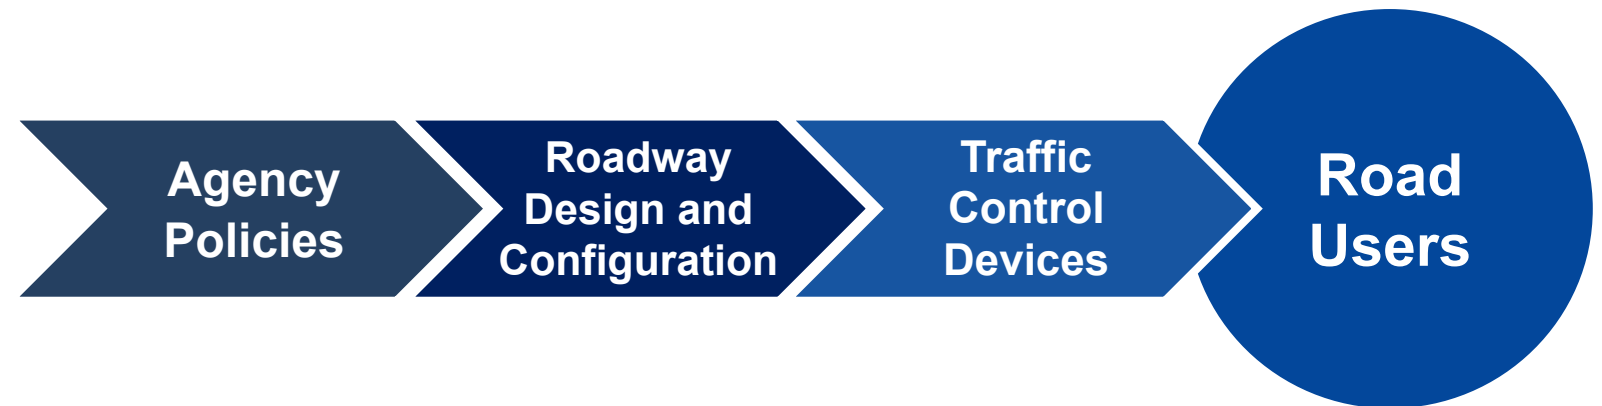



ACCESSIBILITY



U.S. Department
of Transportation

**Federal Highway
Administration**

Traffic Control Devices . . . the Voice of the Road.

Public Right-of-Way Accessibility Guidelines (PROWAG) (1/3)

► PROWAG and the MUTCD:

- ▷ U .S. Access Board issued PROWAG Final Rule ¹
- ▷ PROWAG and MUTCD 11th Edition rulemakings were done concurrently:
 - ▷ Timing precluded inclusion of final PROWAG provisions in the new MUTCD
- ▷ PROWAG provides guidelines, not enforceable Federal standards:
 - ▷ Not enforceable under the Americans with Disabilities Act (ADA) ² until the U.S. Department of Justice (USDOJ) and the U.S. Department of Transportation (USDOT) adopt standards consistent with PROWAG through separate rulemaking processes

¹ 88 FR 53604 (August 8, 2023)

² Pub. L. No. 101-336 (July 26, 1990)



Public Right-of-Way Accessibility Guidelines (PROWAG) (2/3)

► PROWAG and the MUTCD:

- ▷ MUTCD does not establish accessibility standards but addresses accessibility in certain instances
- ▷ After the USDOJ adoption of ADA standards consistent with PROWAG, FHWA will commence rulemaking to revise the MUTCD to reflect DOJ's standards
- ▷ Until PROWAG related standards are adopted by USDOJ and USDOT, State and local agencies have some flexibility in determining how to comply with the general obligation under Title II of the ADA to ensure that their facilities are “accessible to and usable by” individuals with disabilities



Public Right-of-Way Accessibility Guidelines (PROWAG) (3/3)

► PROWAG and the MUTCD:

- ▷ Agencies that already have (or plan to) adopt PROWAG prior to USDOJ and USDOT adoption are expected to adhere to those provisions
- ▷ Accessibility standards adopted by USDOJ and USDOT cannot provide less accessibility than PROWAG and must be “consistent” with PROWAG
- ▷ Agencies should anticipate that a future edition of the MUTCD will closely reflect the minimum accessibility guidelines established in PROWAG



Accessibility for Pedestrians With Ambulatory Disabilities

- ▶ Improves guidance on pedestrian push button proximity to sidewalk curb ramps
- ▶ Clarifies “easy activation” of pedestrian push buttons as no more than 5 pounds of force to activate
- ▶ Provides expanded guidance on push button location at intersections in section 4I.05 and figures 4I-2 and 4I-3


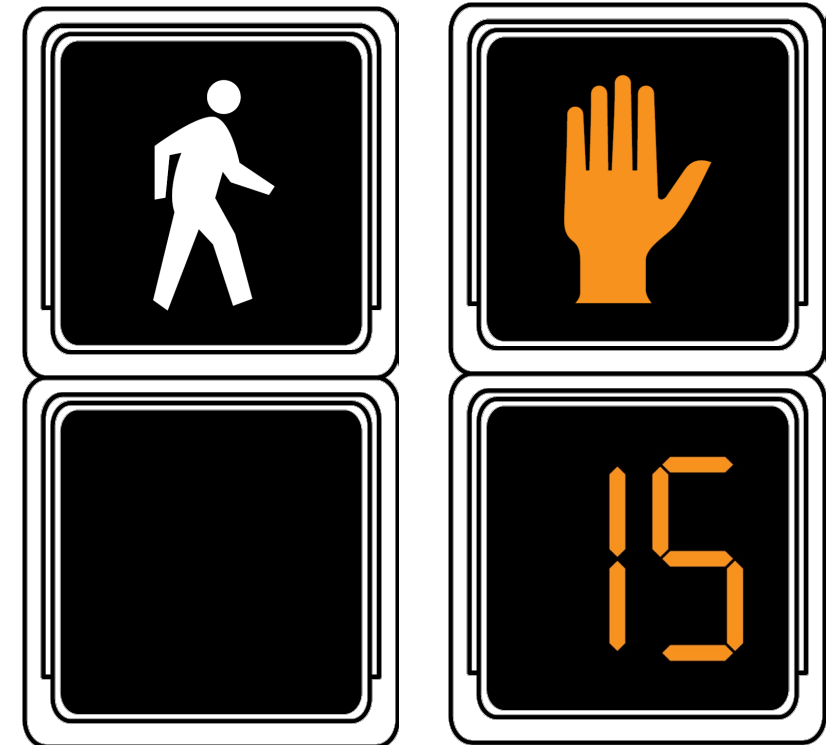


Photo: U.S. Access Board



Pedestrian Signal Heads

- ▶ Required in four specific cases (section 4D.02)
- ▶ Recommended at all traffic control signals with marked crosswalks:
 - ▷ Previously, decision was based on engineering judgment

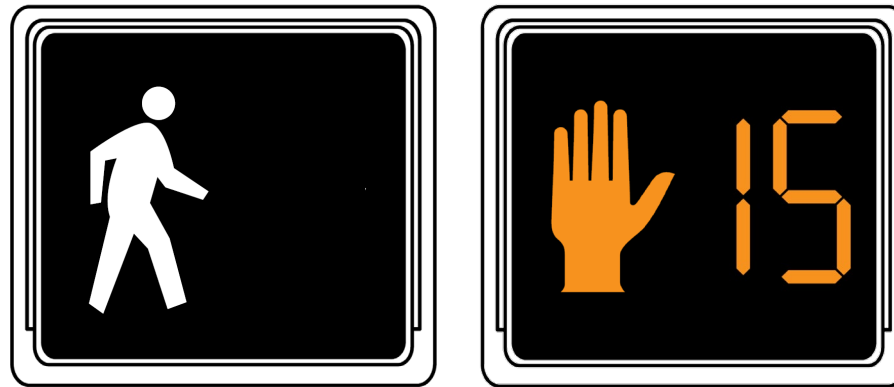

Accessibility for Pedestrians With Vision Disabilities (1/2)

- ▶ Decision on when to use accessible pedestrian signals (APS) is subject to requirements of the ADA and section 504 of the Rehabilitation Act of 1973¹
- ▶ Recommends audible information device (AID) at rectangular rapid-flashing beacons, pedestrian-actuated warning beacons, and in-roadway warning lights at crosswalks



¹ Pub. L. No. 93-112 (September 26, 1973)



Accessibility for Pedestrians With Vision Disabilities (2/2)

- ▶ New Chapter 4K: APS and detectors
 - ▷ Clarifies that percussive tones indicating the walk interval are required when push buttons are separated by 10 feet or more on an individual corner of an intersection
 - ▷ Specifies that speech messages indicating the walk interval are only permitted when push buttons on an individual corner of an intersection are separated by less than 10 feet
 - ▷ No implied intent to use speech messages for all corners of an intersection if 10 feet or more separation can be achieved on other corners at the same intersection




Accessibility in Work Zones (1/2)

- ▶ Revised text that addresses sidewalk closure, alternate routes during construction and accessible pedestrian access
- ▶ Eliminated text that refers to a level of usage by pedestrians with disabilities as a basis for taking certain accessibility-related actions
- ▶ Eliminated text suggesting accommodation of pedestrians with disabilities is sometimes unnecessary



Accessibility in Work Zones (2/2)

- ▶ For blocked routes and alternate crossings:
 - ▷ Recommends audible information to match signing messages provided for sighted pedestrians
 - ▷ Audible messages can be activated by passive detection (preferred), push button detection, or continuously played
 - ▷ Recommends a locator tone if a push button is used

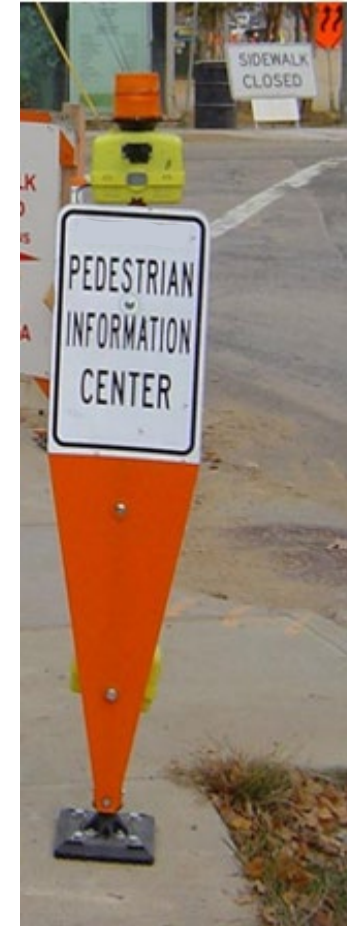

TRAFFIC SIGNALS AND PEDESTRIAN HYBRID BEACONS

Warrants

Research Needs



U.S. Department
of Transportation

**Federal Highway
Administration**

Traffic Control Devices . . . the Voice of the Road.

Traffic Signal Warrants

- ▶ Traffic signal warrants changed from standard to guidance
- ▶ Reinforces that other factors, beyond the warrants, be considered as part of the engineering study to justify installation of traffic control signals
- ▶ Agencies have more flexibility to consider other relevant factors in addition to reliance on the numerical warrant analysis alone



Warrants for Pedestrian Hybrid Beacons (PHBs)

- ▶ New provisions to support expanded use:
 - ▷ Option to reduce vehicle and pedestrian thresholds by up to 50% based on usage by slower walking pedestrians
 - ▷ Agencies have flexibility to consider other relevant factors in addition to reliance on the volume thresholds alone





MARKED CROSSWALKS




U.S. Department
of Transportation

**Federal Highway
Administration**

Traffic Control Devices . . . *the Voice of the Road.*

Marked Crosswalks (1/2)


- ▶ **Recommended** at locations controlled by traffic control signals
- ▶ Uncontrolled crosswalks:
 - ▷ **Revised criteria** for engineering study

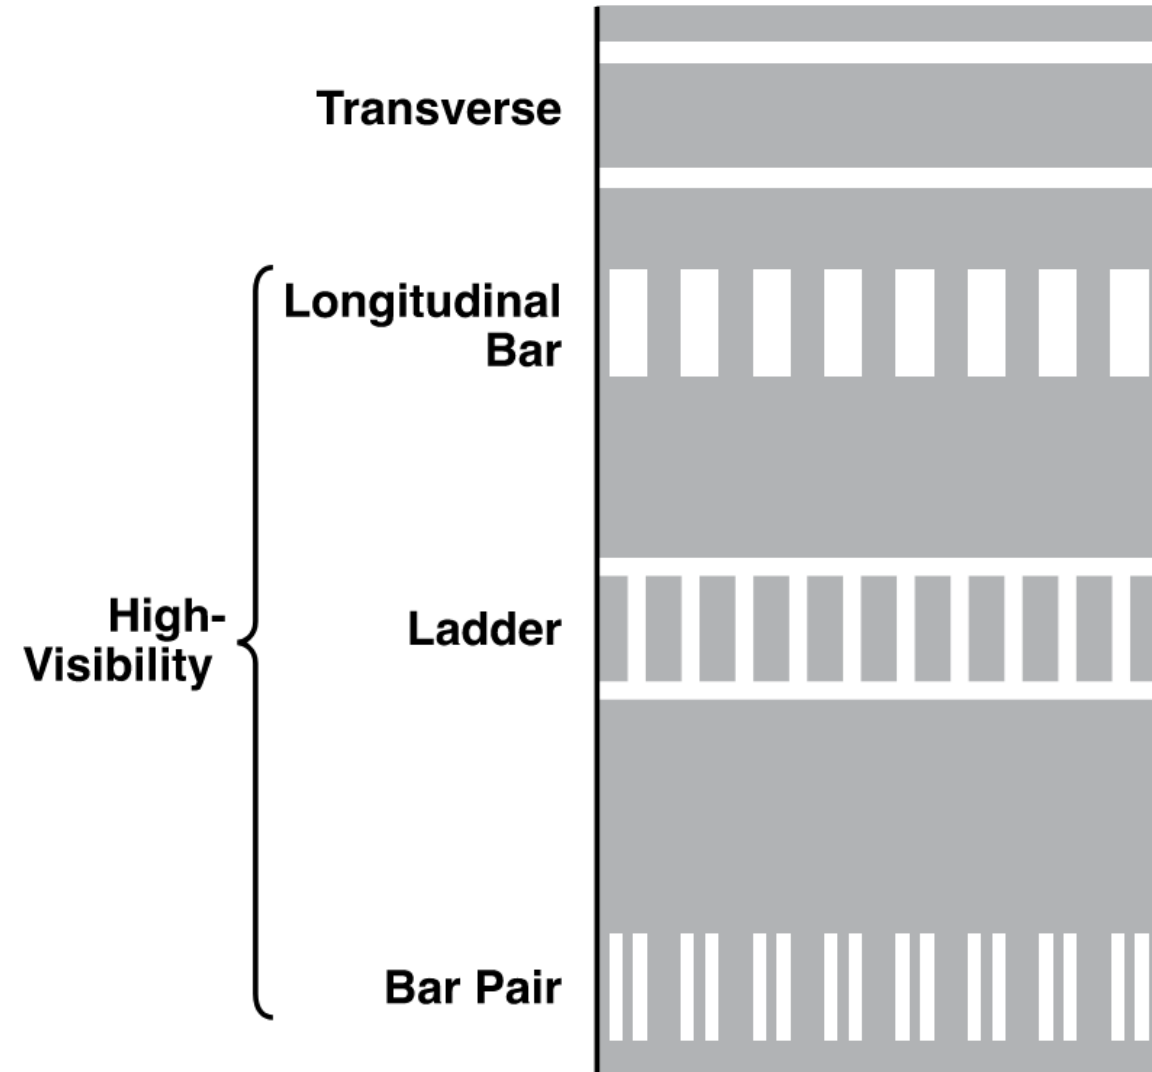

Marked Crosswalks (2/2)

► Types of crosswalk markings:

- ▷ Transverse line:
 - ▷ **Recommended** to extend the full width of the pavement or edge of intersecting crosswalk
- ▷ High visibility:
 - ▷ **Recommended** at non-intersection locations

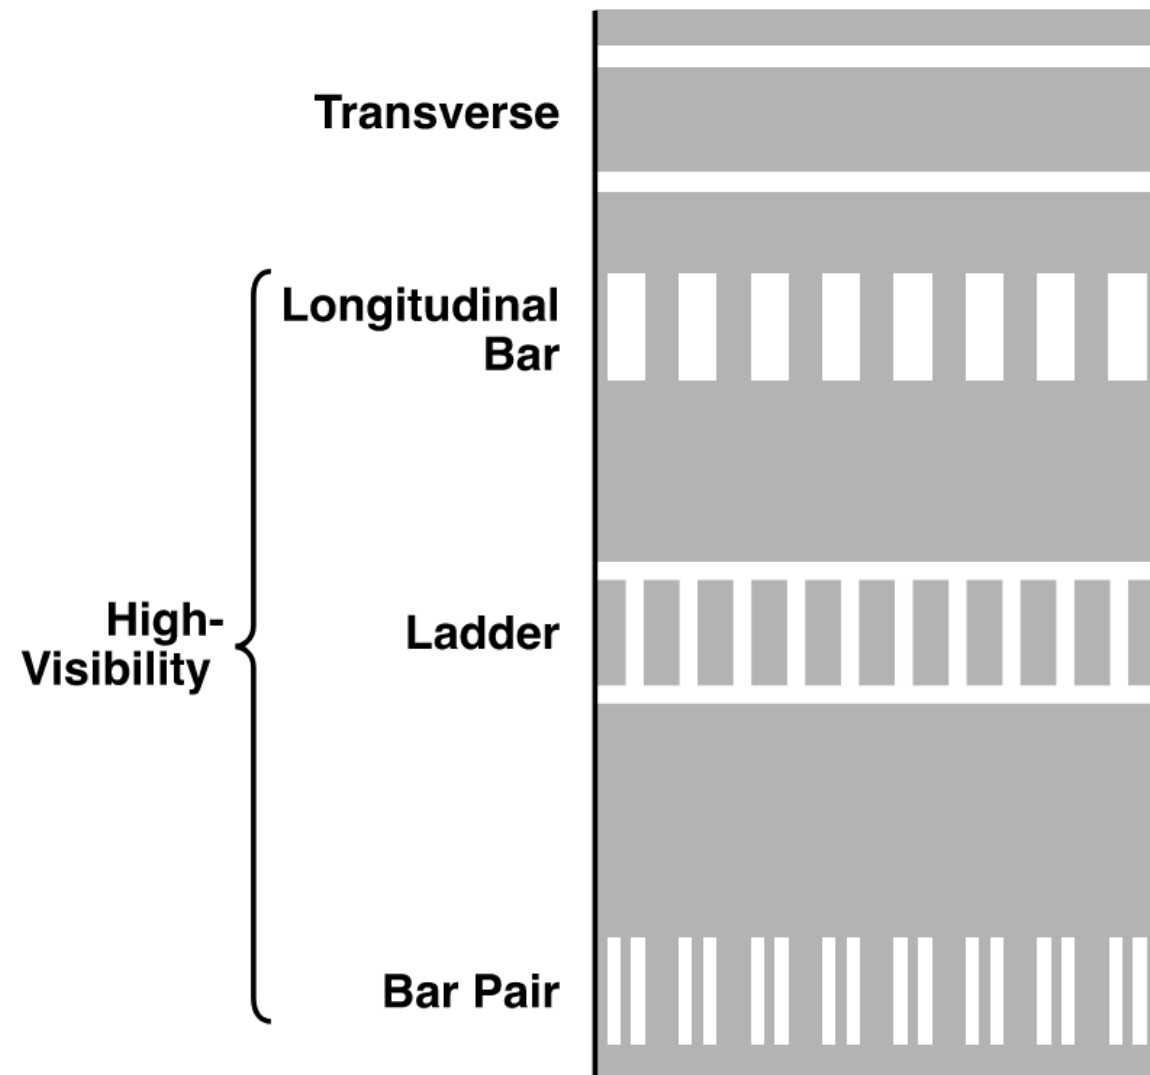

Crosswalk Markings at Non-intersection Crossings


- ▶ Crosswalk markings at non-intersection locations with legally established crosswalks
- ▶ Recommends other traffic control devices in addition to crosswalk markings at locations:
 - ▷ Posted speed limits of 40 mph or greater
 - ▷ Locations where there is a crash threat due to multiple lane crossings or limited sight distance
 - ▷ When adequate visibility cannot be provided by parking prohibitions



Design of Crosswalk Markings


- ▶ Paving materials used as transverse lines **required** to be retroreflective
- ▶ New marked crosswalk Standards
 - ▷ 6 ft minimum width
 - ▷ 8 ft minimum for crosswalks at non-intersections and where the posted speed limit is 40 mph or greater
 - ▷ Where curb ramps provided, they are contained within the extension of the crosswalk markings

Transverse

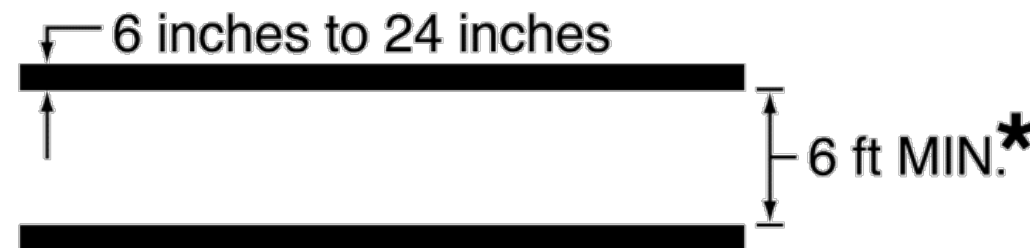


Sidewalk Extensions

- ▶ New provisions address sidewalk extensions designated by pavement markings (not physical construction)
 - ▷ Recommends that channelizing devices be used to provide enhanced conspicuity
 - ▷ Can be used to:
 - ▷ Extend the sidewalk or other pedestrian space
 - ▷ Reduce pedestrian crossing distance
 - ▷ Alter roadway geometry for speed management
 - ▷ Improve pedestrian safety

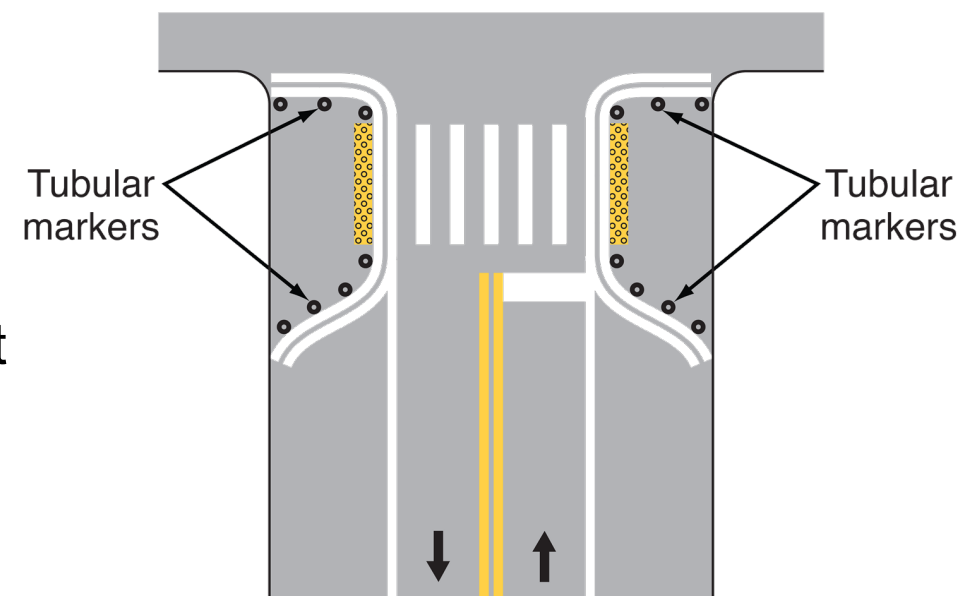

Aesthetic Surface Treatments

- ▶ Differ from colored pavement:
 - ▷ Aesthetic treatments serve no traffic control purpose and are not traffic control devices
 - ▷ Colored pavement serves a traffic control purpose (as specified in the MUTCD)
- ▶ MUTCD does not prohibit aesthetic surface treatments but does limit how they interact with official traffic control devices:
 - ▷ Cannot mimic, obscure, or otherwise adversely impact the effectiveness of traffic control devices

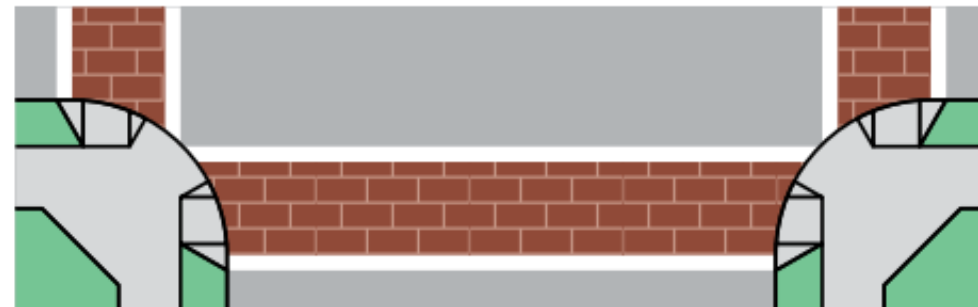

BICYCLE FACILITIES



U.S. Department
of Transportation


**Federal Highway
Administration**

Traffic Control Devices . . . *the Voice of the Road.*

Bicycle Lanes

- ▶ Pavement markings on bicycle facilities shall be retroreflective unless the pavement markings are visible under provided lighting
- ▶ Longitudinal pavement markings AND bicycle lane symbol or word markings shall be used to define bicycle lanes
- ▶ Portion of the travel way cannot be both a shoulder and a bicycle lane

Figure 9E-1. Word, Symbol, and Arrow Pavement Markings for Bicycle Lanes

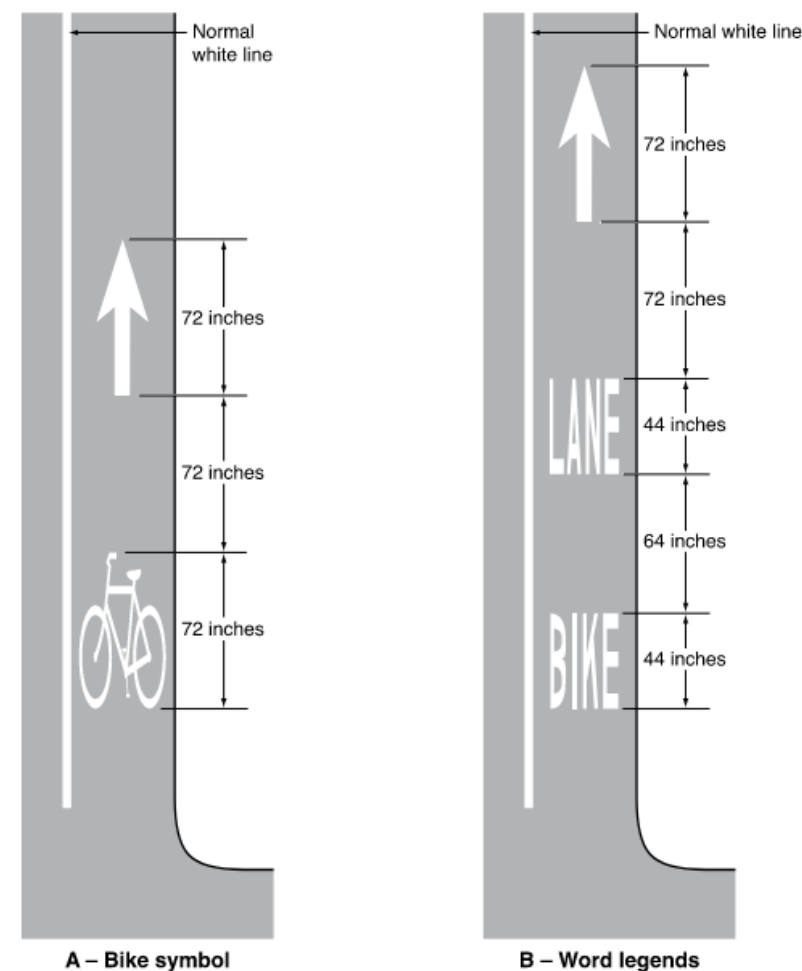


Green-Colored Pavement

- ▶ **Green-colored pavement** enhances conspicuity of bicycle lanes and bike lane extensions and can enhance conspicuity of certain bicycle lane symbols and arrows.




Green-colored pavement (optional)

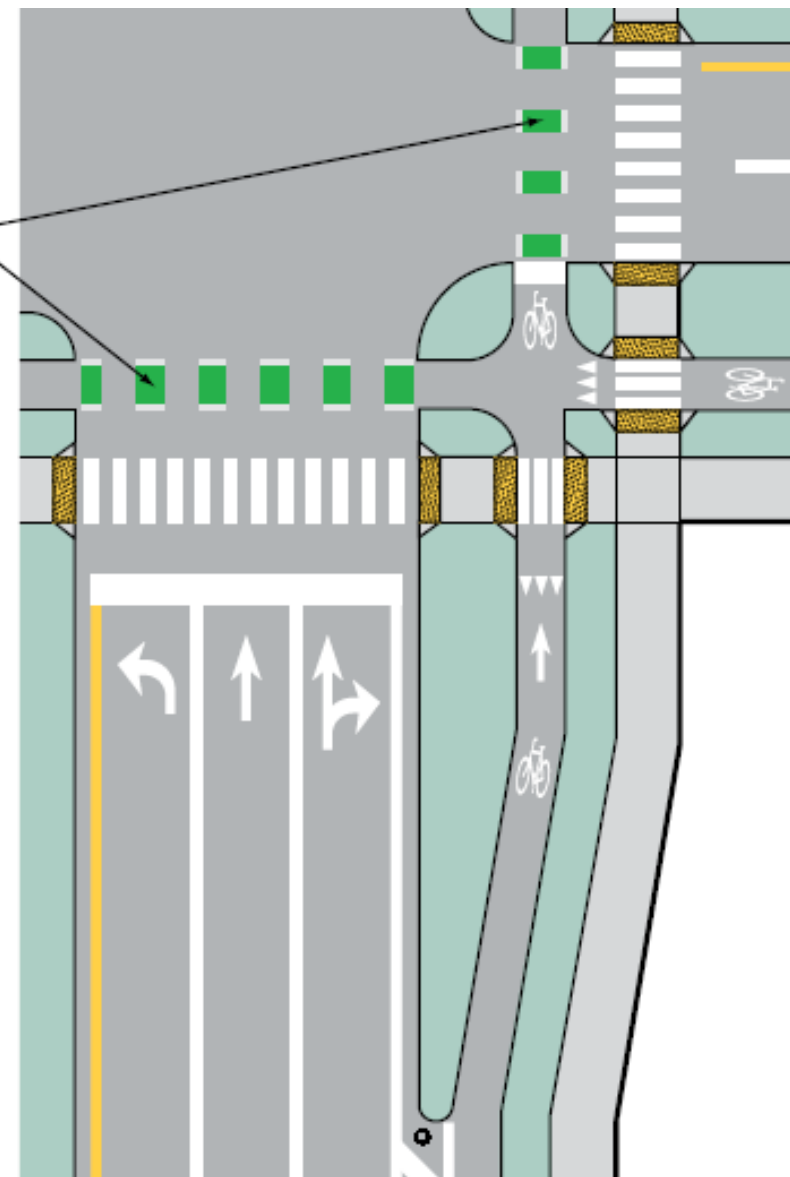

Bicycle Box

- ▶ New section and new figure
- ▶ Locations, markings, signal yellow change and red clearance intervals, and countdown pedestrian signals required when the bicycle box extends across more than one approach lane of motor vehicles
- ▶ Right-on-red is prohibited when box present

Figure 9E-12. Examples of Intersection Bicycle Boxes (Sheet 1 of 2)

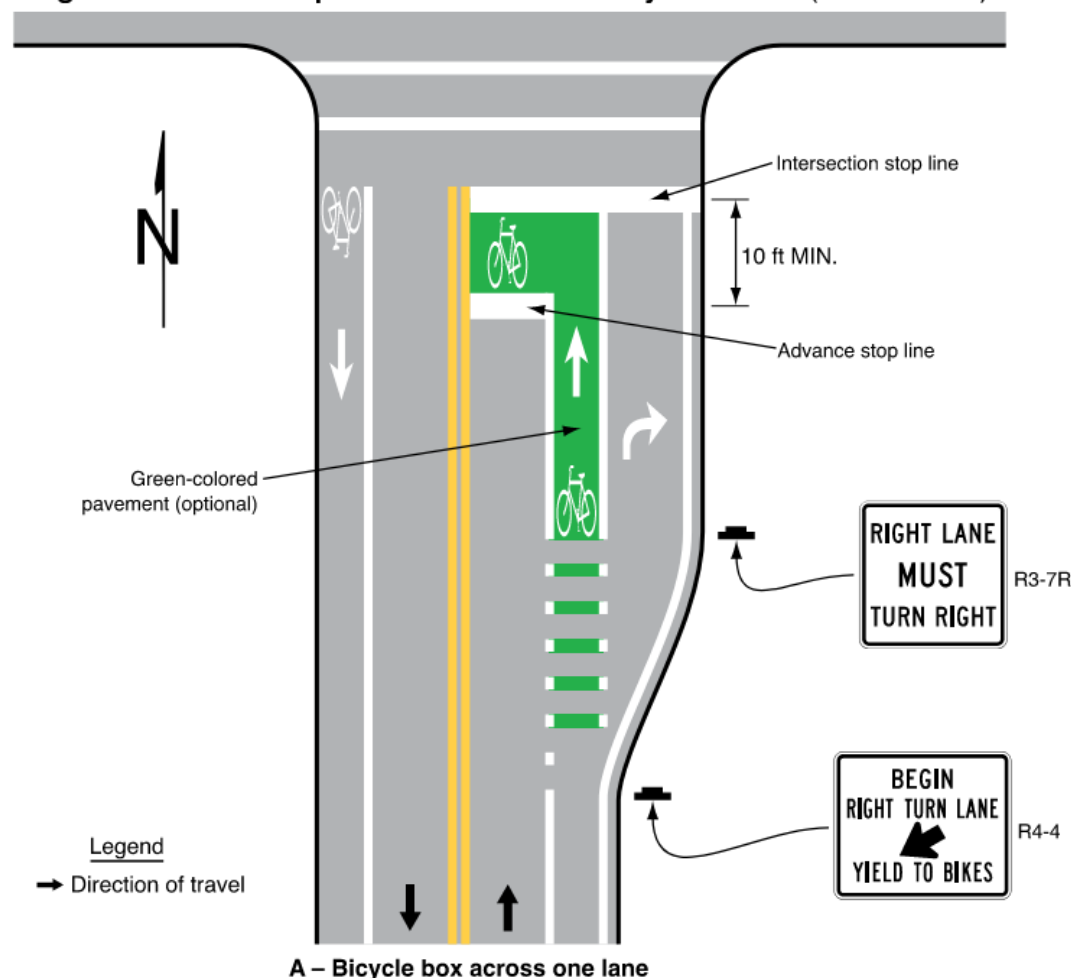

New Bicycle Facilities Signs



R4-19




R10-40



R10-40a



R10-41



R10-41a



R10-41b



R10-41c



W16-21P



D2-2a



M1-9




M1-8b



- ▶ Should not be used on roadways with speed limits of 40 mph or greater
- ▶ May be used with, or instead of, the R9-20 Bicycles Allowed Use of Full Lane sign
- ▶ Shall not be used with green-colored pavement as a background
- ▶ Black background markings may be used as an option



R9-20

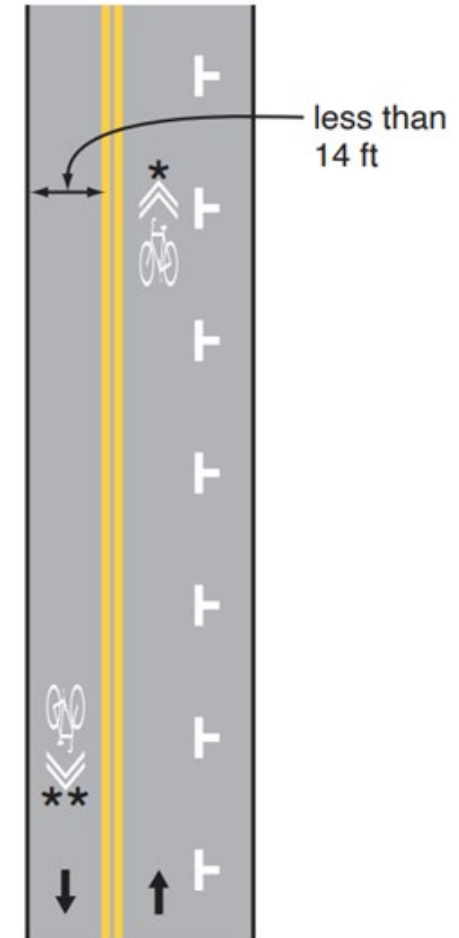

Shared-Lane Markings for Circular Intersections

- ▶ Allows shared-lane markings in the circulatory roadway of multilane circular intersections
- ▶ Shared-lane markings should be located within the center of the lane when used in circular intersections




Bicycle Lanes at Intersection Approaches (1/2)

Figure 9E-3. Examples of Bicycle Lane Markings on an Approach to an Intersection
(Sheet 3 of 3)

Through bicycle lane shall not be:


- ▶ Positioned to the right of a right-turn-only lane or left of a left-turn-only lane unless controlled by a bicycle signal indication that removes conflicts
- ▶ Painted with dots within a general-purpose turn lane

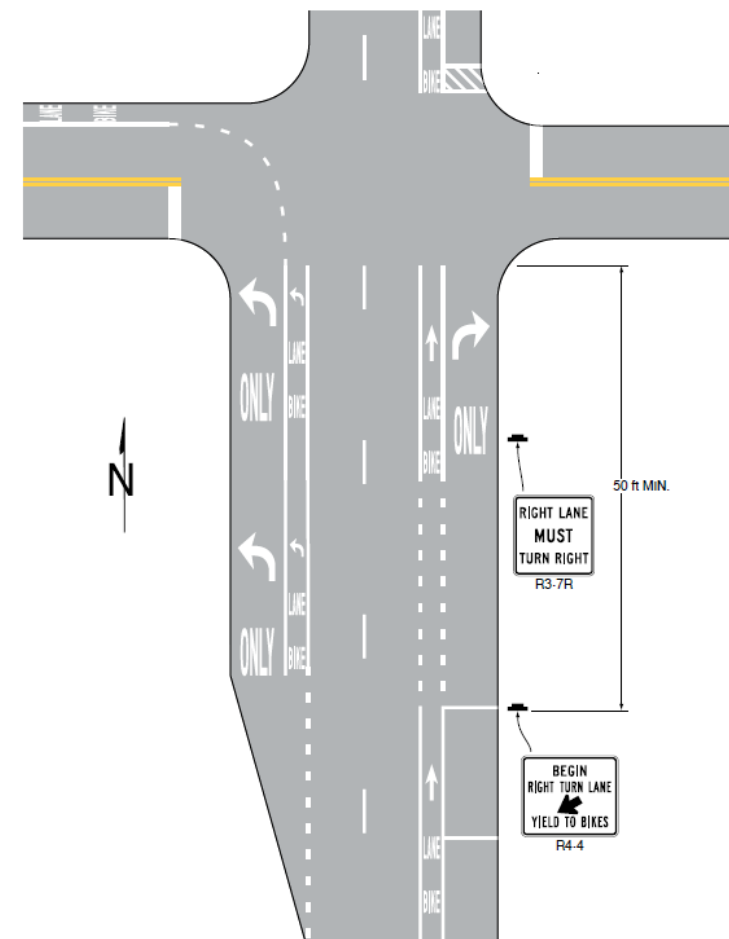

Bicycle Lanes at Intersection Approaches (2/2)

- ▶ Bicycle travel may be accommodated within turn lane using shared-lane markings
- ▶ Mixing zones require bicycles and general traffic to share space


Figure 9E-5. Examples of Pavement Markings for Mixing Zones

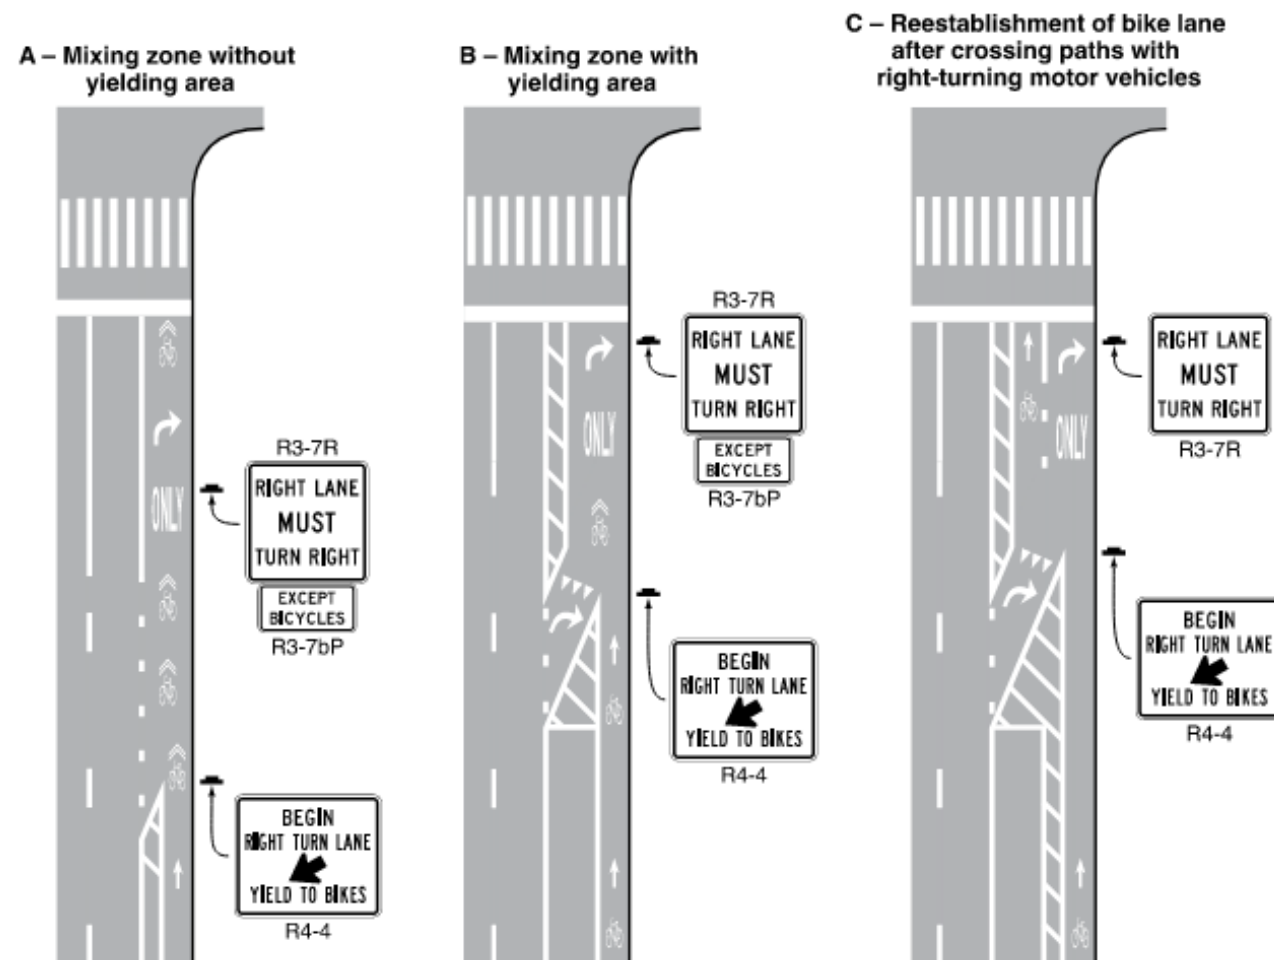

Extensions of Bicycle Lanes Through Intersections

- ▶ Shared-lane markings and chevrons **shall not** be used through intersections
- ▶ Requires dotted lane line patterns
- ▶ Lateral limits of bicycle lane extensions shall be marked when the bicycle lane is contiguous to a crosswalk



Figure 9E-2. Example of Pavement Markings for Bicycle Lanes on a Two-Way Street

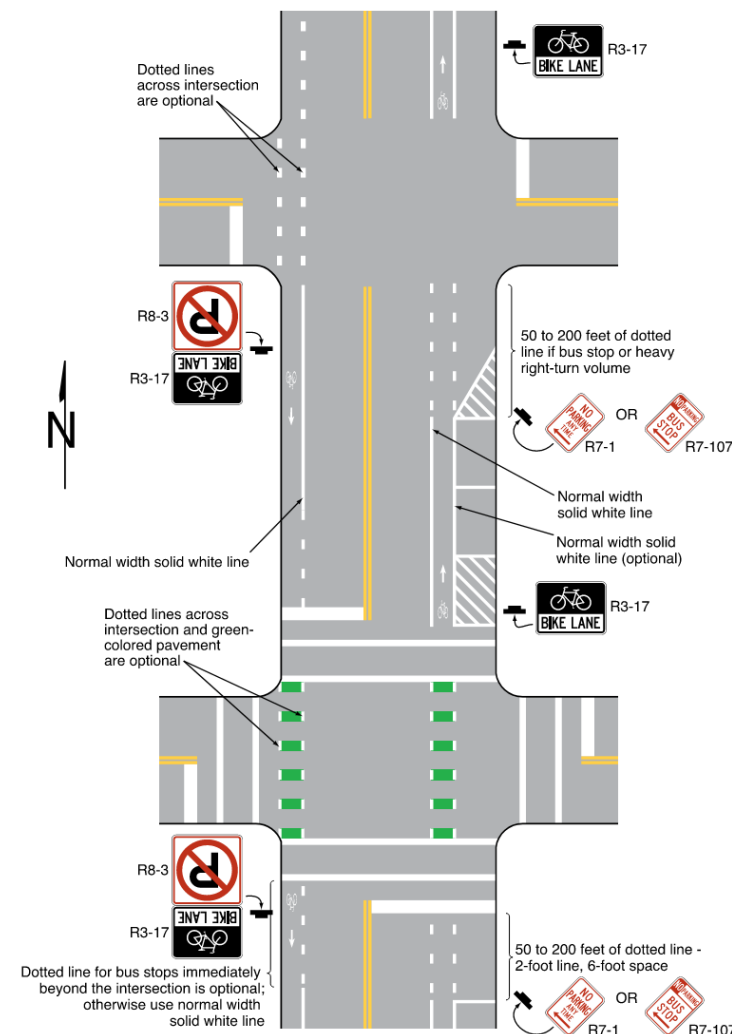

Bicycle Lanes at Driveways

New options for bicycle lanes at or through driveways to allow:

- ▶ Solid or dotted lines
- ▶ Bicycle symbol, arrow marking, word marking, or combination thereof
- ▶ Green-colored pavement

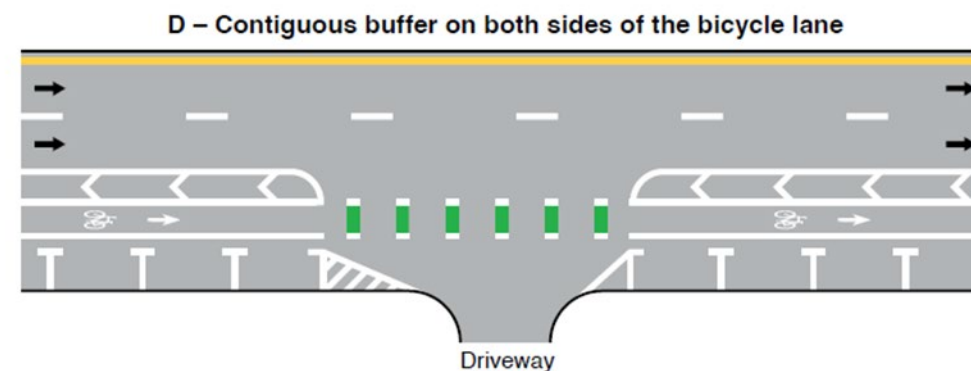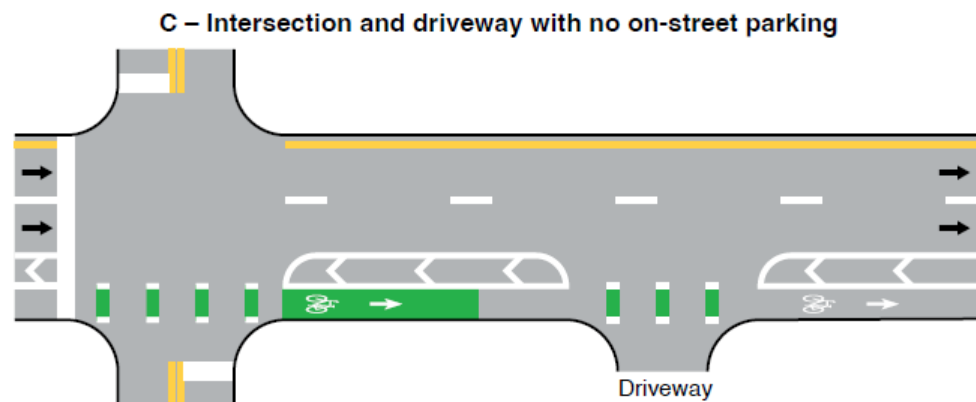


Buffer-Separated Bicycle Lanes

- ▶ Lateral separation between a bicycle lane and a general-purpose lane using pavement markings
- ▶ Can be used adjacent to on-street parking to reduce crashes with vehicle doors opening
- ▶ No vertical elements (separated bike lanes use vertical elements)

A – Buffer-separated bicycle lanes on a two-way street with no parking

For a buffer space greater than 3 feet wide, chevron or diagonal markings shall be applied

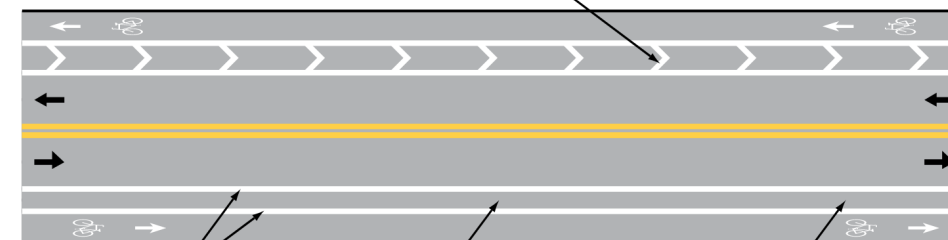


Normal width solid white line

Buffer space should be at least three times the width of longitudinal lines used to define it

For a buffer space less than 2 feet wide, no chevron or diagonal markings may be applied within the space

B – Buffer-separated bicycle lanes on a two-way street with on-street parking

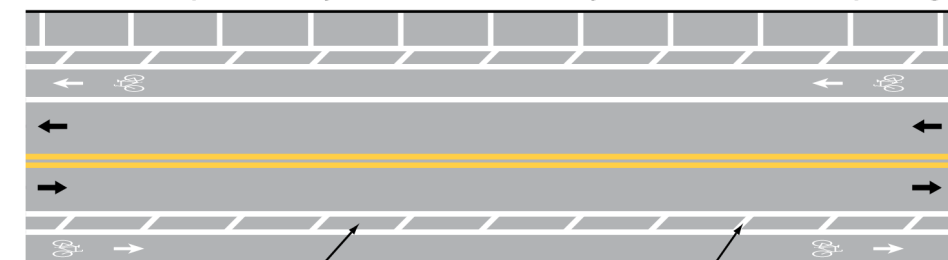

Spacing of chevron or diagonal markings should be 10 feet or greater

For a buffer space from 2 to 3 feet wide, chevron or diagonal markings should be applied




Separated Bicycle Lanes

- Provide a physical separation between a general-purpose lane and a bicycle lane using vertical objects or vertical separation between the general-purpose lane and bicycle lane


A – One-way bicycle lanes on a two-way street

Note: Diagonal or chevron markings shall be used if buffer width is 2 feet or greater for separated bicycle lanes.




C – Two-way bicycle lane on a one-way street

Note: Diagonal or chevron markings shall be used if buffer width is 2 feet or greater for separated bicycle lanes.




D – Separated bicycle lane shifted toward the adjacent general-purpose lane

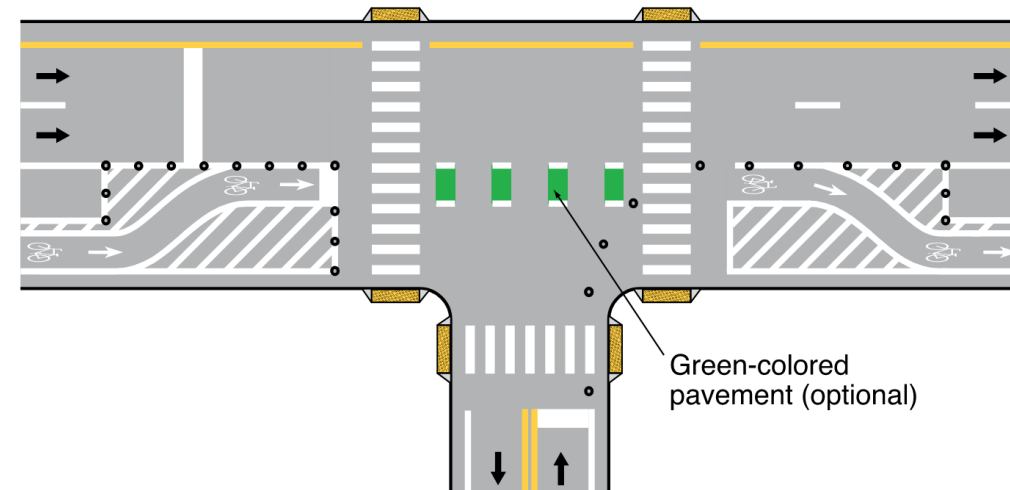


Counterflow Bicycle Lanes

- ▶ New guidance on locating a counterflow bike lane adjacent to a general-purpose lane
- ▶ For speed limits 35 mph or greater, a buffer, a painted or raised median island, or some form of physical separation is required to separate a counterflow bicycle lane from the adjacent travel lane

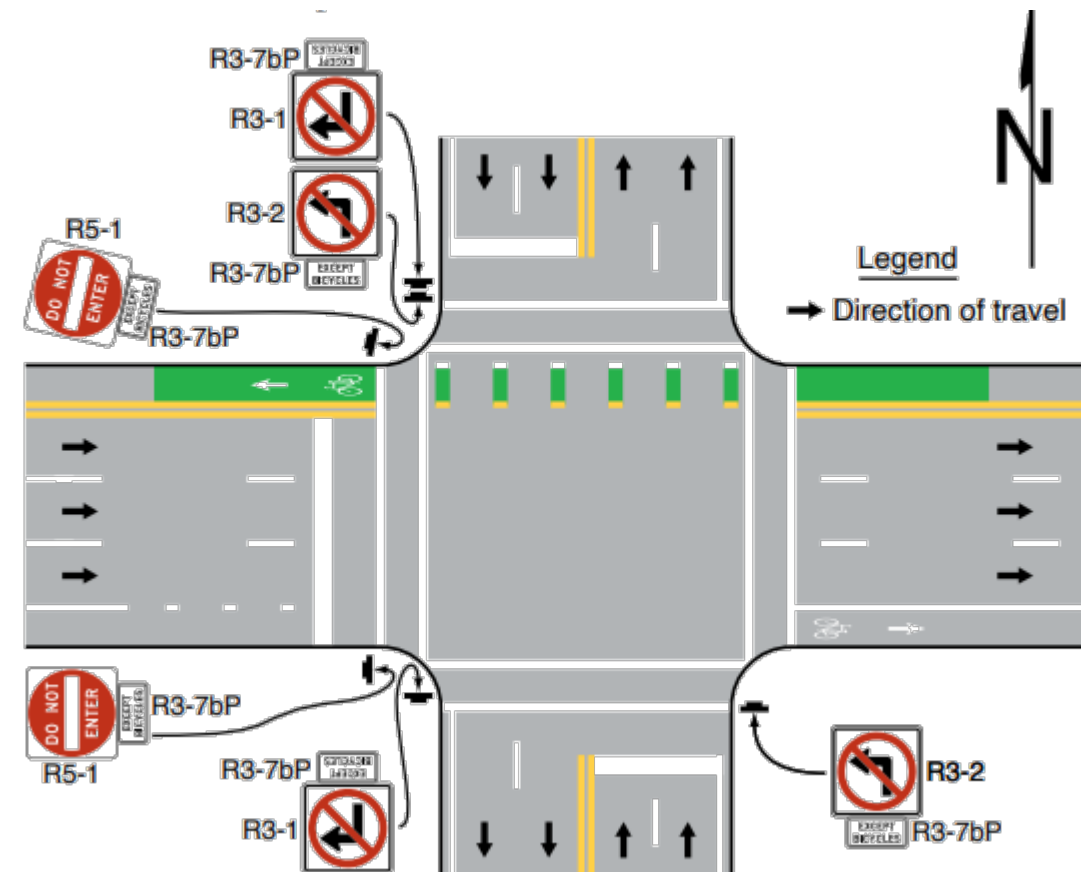


Two-Stage Bicycle Turn Box

- ▶ Allows bicyclists to make easier left turns in urban areas
- ▶ Bicyclists cross intersection to the designated area, then complete their turn when cross traffic gets green signal (two stages)
- ▶ Can be made mandatory for bicycle turns (regulatory signs) or optional for bicycle turns (guide signs)

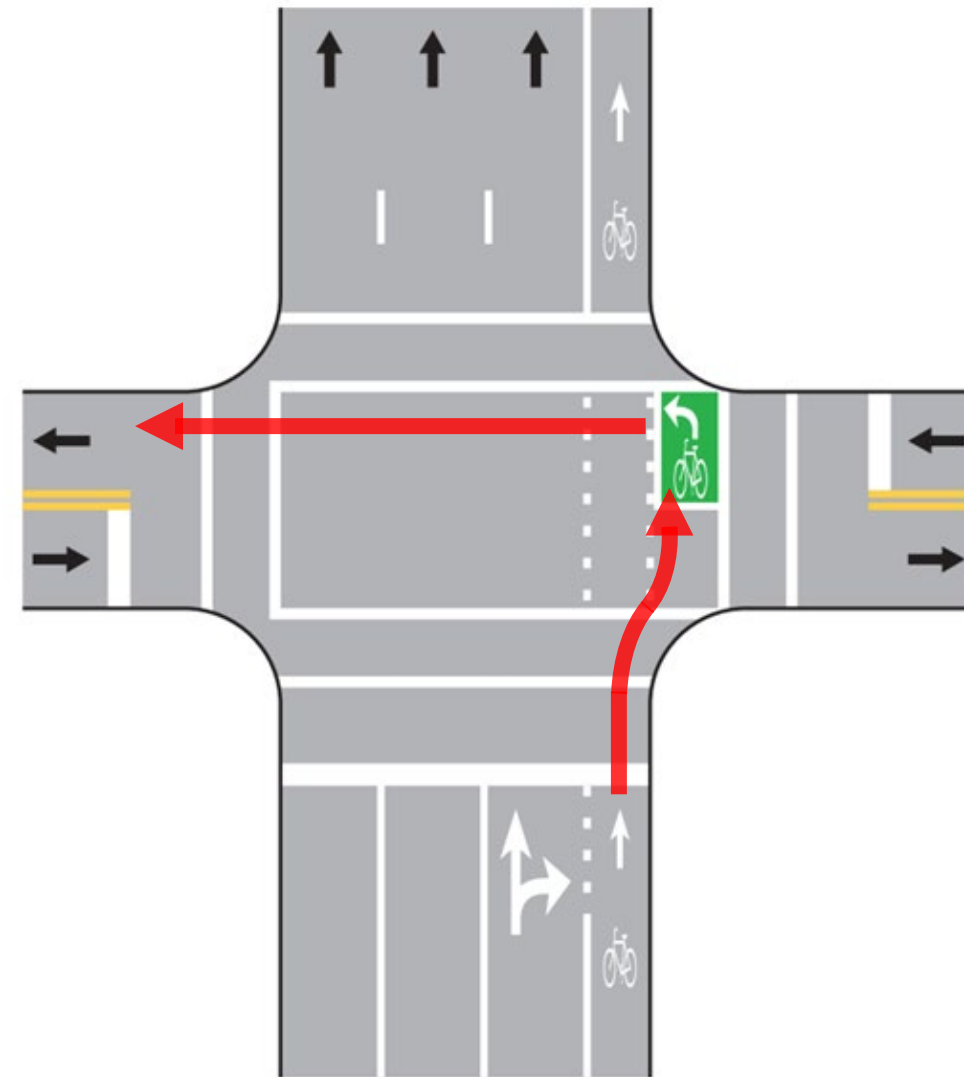

Bicycle Signal Faces (1/2)


- ▶ New device included in new Chapter 4H:
 - ▷ Provides a protected movement for bicyclists
 - ▷ Allows separation of bicyclists in space and time
 - ▷ Flashing yellow bicycle indication allowing conflicting movements with turning motorists is prohibited

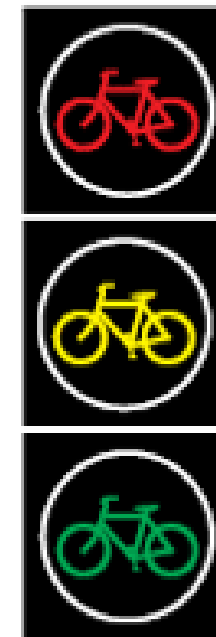

Bicycle Signal Faces (2/2)

- ▶ Not allowed at PHBs
 - ▷ PHB is a pedestrian-specific device
 - ▷ Statutory obligation to provide for protection of vulnerable road users
 - ▷ Consider other treatments to accommodate bicycle mobility and safety (geometric, roadway configuration changes)



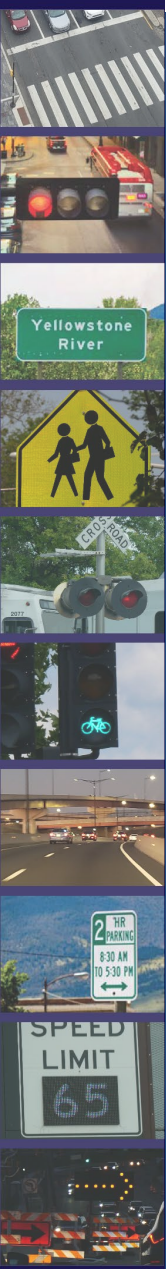

FHWA's National Traffic Control Devices Program



for more information:

mutcd.fhwa.dot.gov

- ☑ e-Subscribe Service
- ☑ Official Rulings Database
- ☑ *Standard Highway Signs*
- ☑ Frequently Asked Questions
- ☑ MUTCD News Feed



U.S. Department
of Transportation
**Federal Highway
Administration**

FHWA's Traffic Control Devices Team

Kevin J. Sylvester P.E., PTOE	Duane Thomas, P.E.
Team Leader	Highway Traffic Signals, Rail/Light-Rail Transit
S. Usman Ali, P.E., PTOE, RSP	Ashley Timm, P.E.
Traffic Control for Automated Vehicles, Standard Highway Signs	Pavement Markings, Standard Highway Signs
Marty Calawa, P.E.	Toni Whitfield, P.E.
Regulatory & Rulemakings Management, General (Part 1)	General Info & Motorist Services Signs, Changeable Message Signs
J. Eric Ferron, P.E.	Matt Zeller, P.E.
Temporary Traffic Control	Regulatory & Warning Signs, School Zones
Dean Mentjes	Adison Zoretic, P.E., PTOE
Outreach & Training Coordination, Bicycle Facilities, Vulnerable Users	Pooled-Fund Study, Guide & Managed Lane Signs, Standard Highway Signs



U.S. Department of Transportation
Federal Highway Administration

contact us...24/7/365

mutcd.fhwa.dot.gov




Learn More



mutcd.fhwa.dot.gov



U.S. Department
of Transportation
**Federal Highway
Administration**

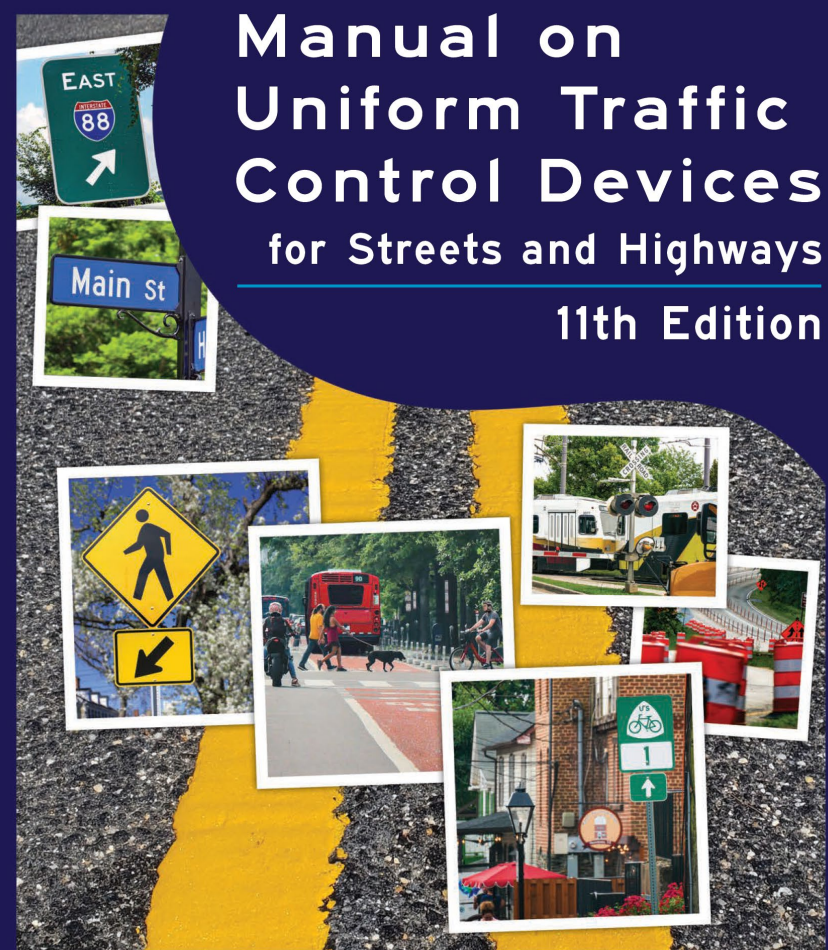

Manual on Uniform Traffic Control Devices for Streets and Highways 11th Edition

December 2023



U.S. Department of Transportation
Federal Highway Administration

Traffic Control Devices . . . *the Voice of the Road.*